
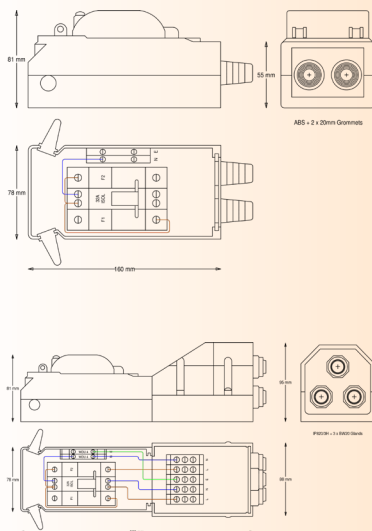


DPI ISOLATOR UNIT

3 MODULE ISOLATOR UNIT

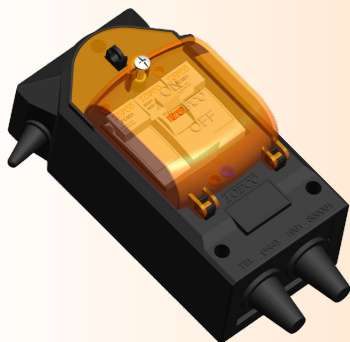

DPI Isolator Unit	
DPI	32A Double Pole Switch, Three Module, Single Phase, din rail mounted three way internal colour coded green / yellow encapsulated earth block
DPI / F1L	32A Double Pole Switch + 1 x BS88 Fuse carrier pre-wired for one upward lantern circuit, Three Module, Single Phase, din rail mounted three way internal colour coded green / yellow encapsulated earth block
DPI / F1L / 1S	32A Double Pole Switch + 2 x BS88 Fuse carriers pre-wired for one upward lantern and one downwards spur circuits, Three Module, Single Phase, din rail mounted three way internal colour coded green / yellow encapsulated earth block
DPI / F1L / SPD	32A Double Pole Switch fitted with Type 2+3 SPD series wired for optimal safety and pre-wired to 1 x BS88 Fuse carrier for one upward lantern circuit, Three Module, Single Phase, din rail mounted three way internal colour coded green / yellow encapsulated earth block
DPI / F2L	32A Double Pole Switch + 2 x BS88 Fuse carrier pre-wired for two upward lantern circuits, Three Module, Single Phase, din rail mounted three way internal colour coded green / yellow encapsulated earth block

Height: 160mm, **Width:** 78mm, **Depth:** 80mm. Designed to accept BS88 LD & MD fuse links up to 32A (29x12.7mm). Moulded from flame retardant self extinguishing ABS. Miniature Circuit Breakers, RCD, RCBO and Time Clocks can be fitted instead of fuses. Fitted with live, neutral and earth terminals as standard.

Extension Boxes	
B1	Two Way Short Extension Box for up to 25mm² cable
Height 50 x Width 90 x Depth 67mm, 100mm from fused unit terminal block to cable entry plate.	
B21	Two Way Long Extension Box, for up to 5 terminal blocks for up to 25mm² cable
Height 123 x Width 88 x Depth 58mm, 70mm from terminal block to entry plate.	
B31	Three Way Long Extension Box, for up to 5 terminal blocks for up to 35mm² cable
Height 123 x Width 88 x Depth 95mm, 70mm from terminal block to entry plate.	

Other extension boxes are also available for up to 50mm² circular conductors, please call for details.

Cable Entry Plate Options	
IP4	Two Way Internal Brass Plate for use with DPI cut-out unit, available with 2x20mm holes
IP720 / 25	Two Way Internal Brass Plate for use with B1 or B20 extension boxes, available with 2x20mm or 2x25mm holes
IP721 / 26	Two Way Internal Brass Plate for use with B21 extension box, available with 2x20mm or 2x25mm holes
IP8	Three Way Internal Brass Plate for use with B31 extension box, available with 3x20mm, 3x25mm or 2x32mm holes



**HEA / HEMSA Manufacturer
of The Year 2018**

TOFCO CPP LIMITED. MEADOWFIELD IND. EST. PONTELAND, NORTHUMBERLAND, NE20 9SD

Office Tel: 01661 860001 Email: info@tofco.co.uk Website: www.tofco.co.uk

REGISTERED IN ENGLAND 5893596