

## CUT-OUT UNIT FOR UPTO 2 x 16mm<sup>2</sup> 4c SWA Cable


**Order Code - TYPE 5/GCC**

### Dimensions

H - 283mm

W - 88mm

D - 81mm

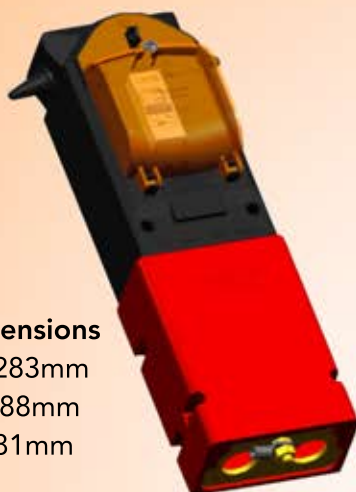

5 x TB030 blocks fitted

H - 20mm; W - 9.5mm; D - 37.5mm



SPD's are available upon request



MCB's are available upon request, please confirm current rating & short circuit rating



BWL & CW Cable Glands are available on request





Fuse Carriers are available upon request

### SPECIFICATION

- Street Lighting Cut-Out Unit
- Space for up to 3 x single pole MCB's or Fuse Carriers and Fuses.
- State MCB's rating & short circuit capacity at time of order
- Earth & Shrouded Neutral block for outgoing lantern cable
- Moulded in flame retardant material
- Hinged lockable lid
- All mouldings are secured by M4 stainless steel captive fixing screws into brass inserts
- Terminal blocks for up to 16mm loop in / loop out 5c cable
- Brass gland plate with 2 x 20mm or 2 x 25mm holes & earth stud/lug kit
- BWL & CW cable glands can be supplied please confirm size & quantity at time of Order
- IP44 Rated - tested and certified by NAREC - ASTA certified Test Laboratory

### CUT-OUT UNIT FOR UPTO 2 x 16mm<sup>2</sup> 4c SWA Cable

**Order Code - TYPE 5/GCC**

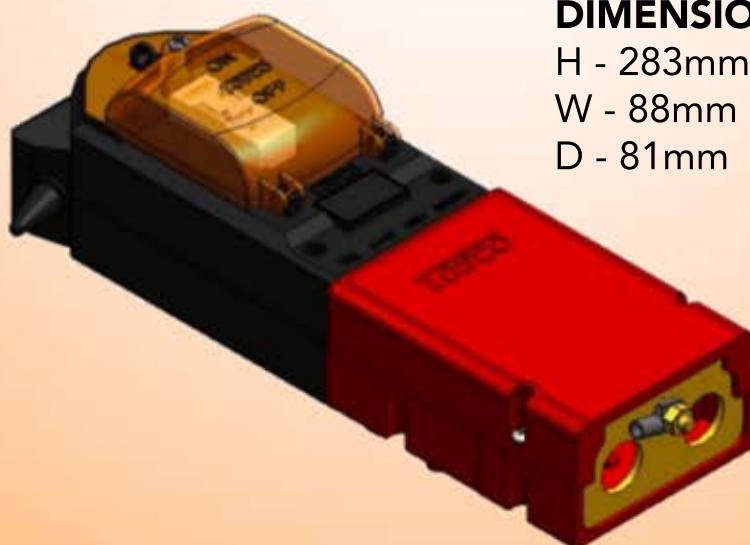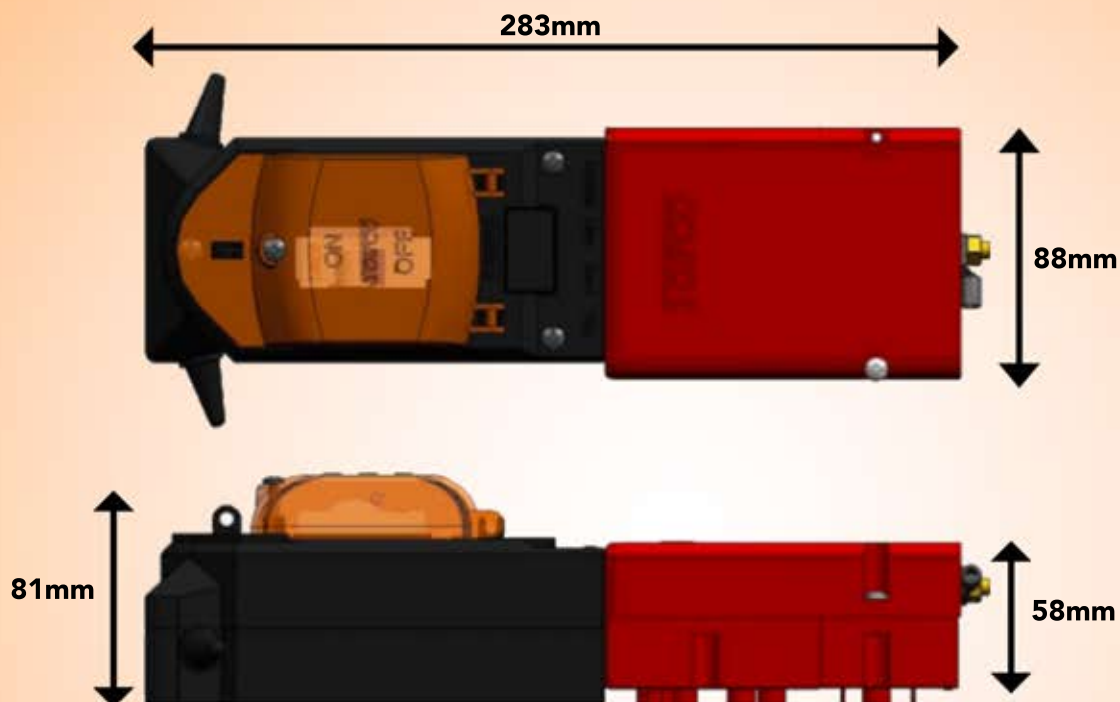

#### DIMENSIONS:

H - 283mm

W - 88mm

D - 81mm