


CUT-OUT UNIT FOR 2 x 25/35mm² 4c SWA Cable

Order Code - TYPE 6/GCC

Dimensions

H - 366mm
W - 114mm
D - 91mm

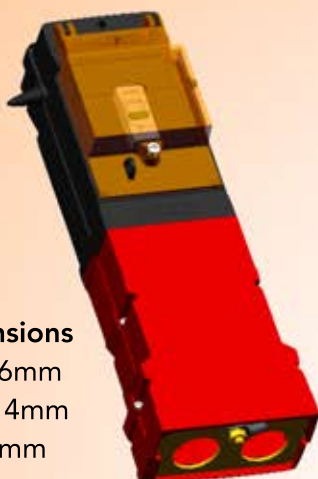

SPD's are available
upon request



MCB's are available
upon request, please
confirm current rating
& short circuit rating



BWL & CW Cable
Glands are available
on request




Fuse Carriers are
available upon request



SPECIFICATION

- Street Lighting Cut-Out Unit
- 1 x 10A 10kA single pole MCB for upward lantern circuit, 3 No additional devices can be added if required. Other ratings are available
- Earth & Shrouded Neutral block for outgoing lantern cable
- Moulded in flame retardant material
- Hinged lockable lid
- All mouldings are secured by M4 stainless steel captive fixing screws into brass inserts
- Terminal blocks for up to 35mm loop in / loop out 4c cable, two & three way blocks available
- New extension box to allow for internal earth cable from gland plate to top Earth block
Gland plate with following options available:
2 x 25mm holes, 2 x 32mm holes
- Glands can be provided fitted to Client specification
- BWL & CW cable glands can be supplied, please confirm size & quantity at time of order
- IP44 Rated - tested and certified by NAREC
ASTA certified Test Laboratory

145mm

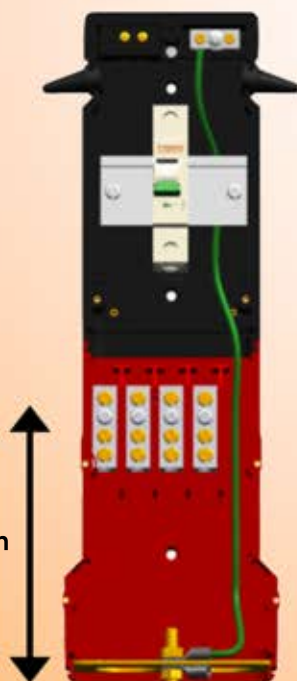

4 x TB031 blocks fitted



H - 26.5mm; W - 12mm; D - 41.5mm

4 x TB031C blocks fitted

H - 32.5mm; W - 12mm; D - 41.5mm

CUT-OUT UNIT FOR 2 x 25/35mm² 4c SWA Cable

Order Code - TYPE 6/GCC

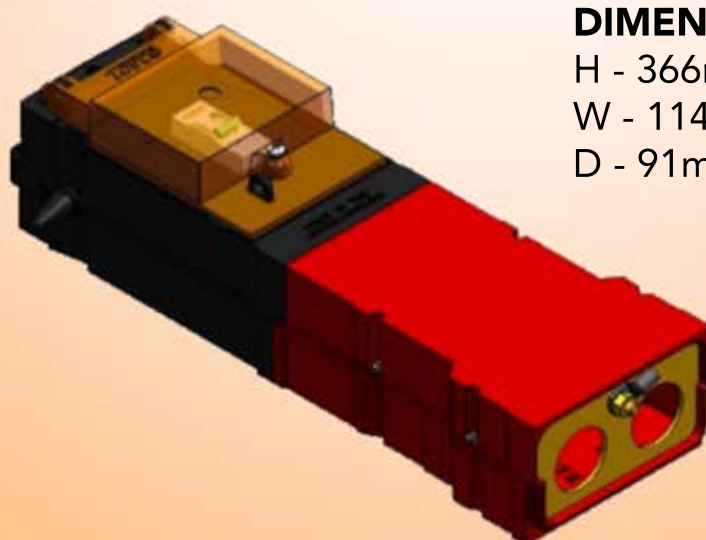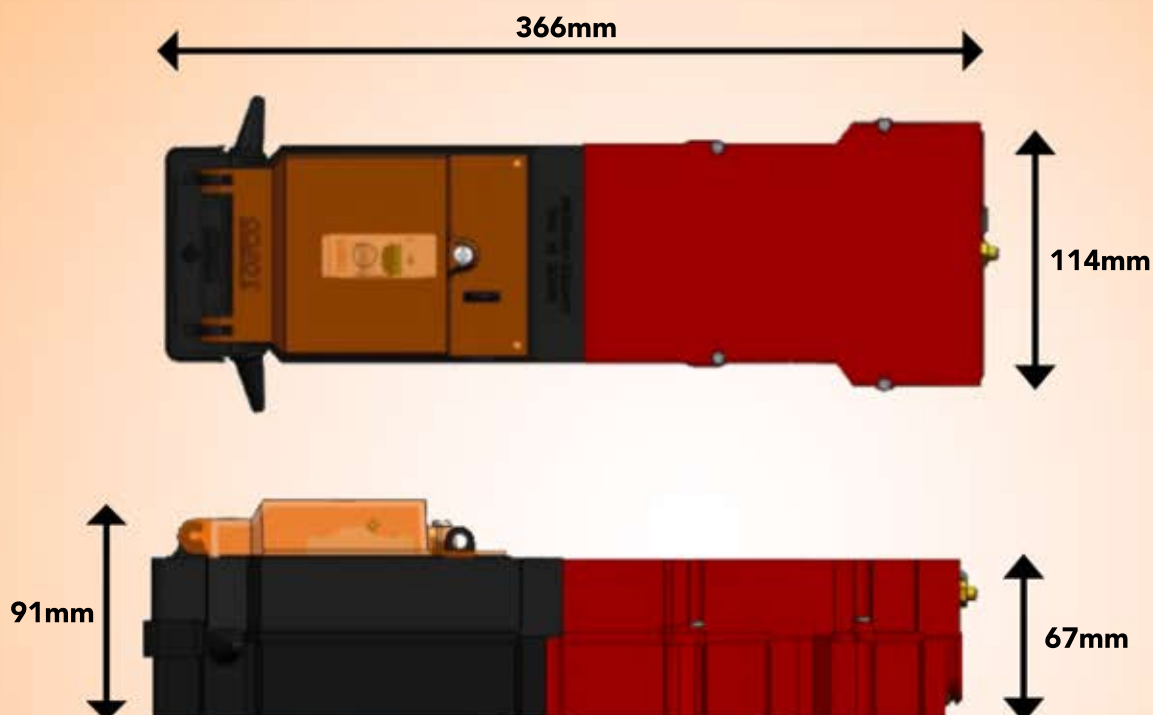

DIMENSIONS:

H - 366mm

W - 114mm

D - 91mm